


10,000 PSI FAILSAFE EQD

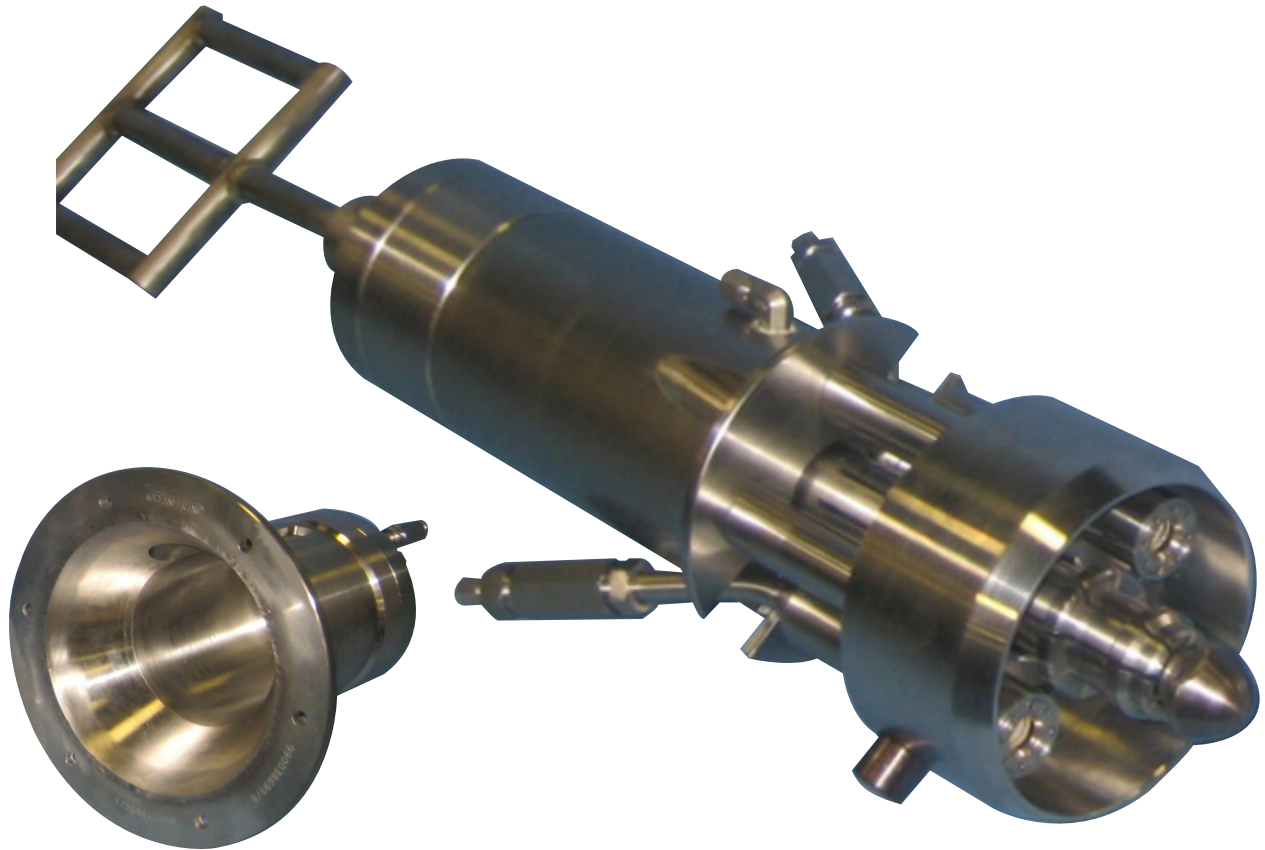

The DTS 10,000 psi Failsafe Emergency Quick Disconnect hot stab uses hydraulic pressure and a collet locking mechanism to engage two National couplers. In the event of ROV hydraulic failure the internal Bellville springs apply enough force to decouple the connectors at any operating pressure and partially eject the stab from the bucket.

Technical Data / Specification

Specification:

Pressure:	10,000 psi Maximum Input
Flow:	Coupler Dependant
Connection Type:	¼ in JIC (Locking Mechanism) 9/16 in Autoclave MP (Flow Ports)

Size & Weight - Male Stab:

Dimensions (Ø x L):	6.5 in x 34 in
Weight:	83 lb

Size & Weight - Female Bucket:

Dimensions (Ø x Deep):	14.3 in x 24.7 in
Weight:	68 lb

