


# QUAD ZERO LEAK

The DTS Quad Zero Leak Stab and Receptacle offers a QD type connection from 1 to 4 ports. The stab can be configured for 2 position directional control as well. Porting on the male side is routed out and down away from the body to aid in hose management. The recessed male connectors are protected by an impact-resistant nose and the stab body is hard-anodized aluminum for a reduced weight and ease of manipulation.

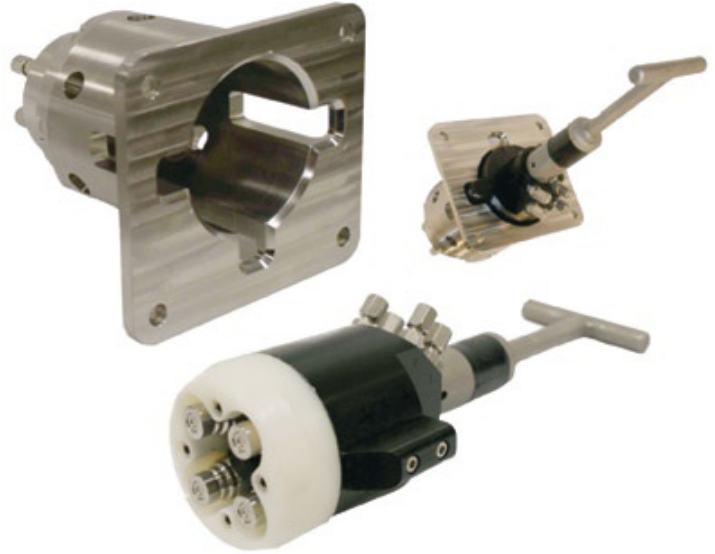

## Specification

Pressure	3,000 psi max input
Flow	5 gpm per port
Connection Type	¼ in JIC (¼ in model shown) (3/8 in and ½ in in development)

## Size and Weight

Male Stab	Less than 20 lb
Female Receptacle	40 lb

