


# SUBSEA JACK-HAMMER

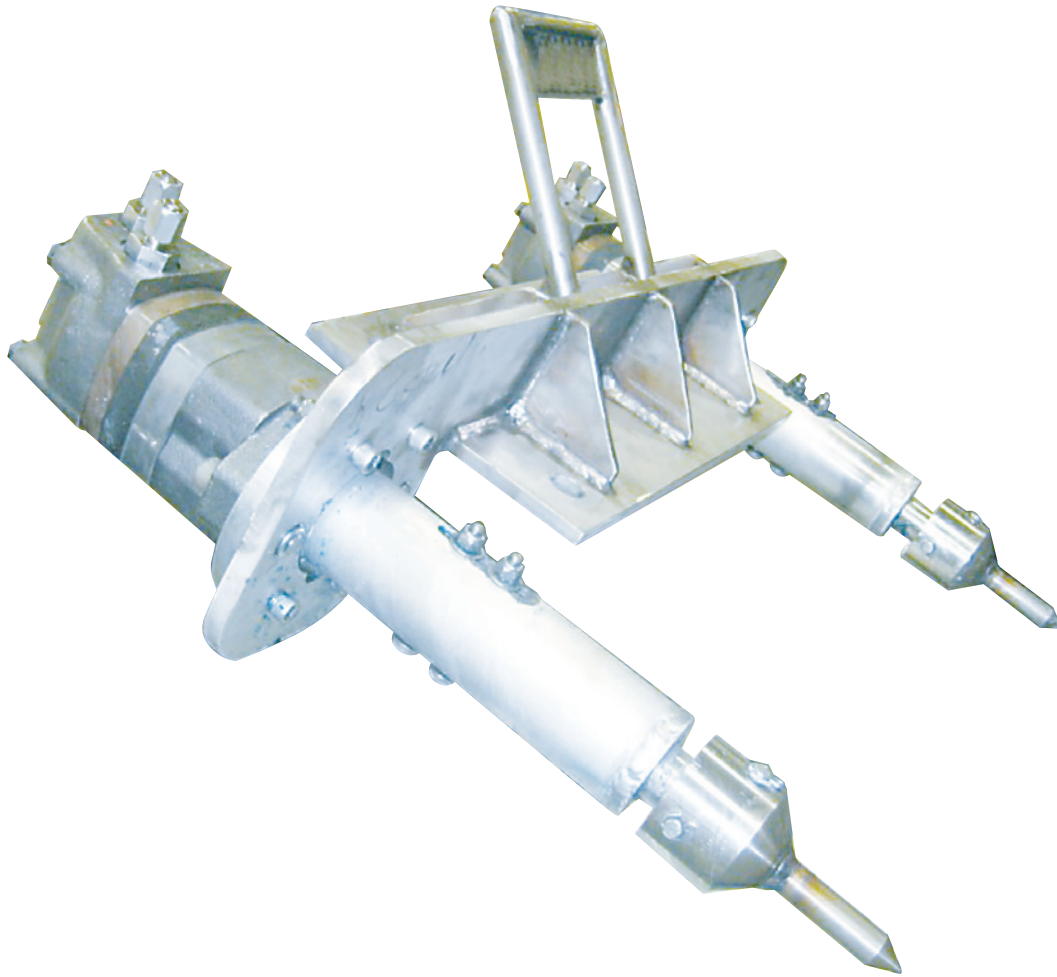

The Subsea Jack-Hammer is designed to mount directly to the 12-inch GTO Dredge hose to break up masses too large to fit in the hose. The Jack-Hammer can also be configured to be held by the ROV manipulator for various other applications. The original application of the Subsea Jack-Hammer was to break up grout bags.

## Technical Data / Specifications

### *Hydraulic Requirements:*

- 1,000 psi @ 12 gpm

### *Weight in air:*

Dredge-Mounted Dual Jack-Hammer: ≈106 lb  
Single Manipulator-Held Jack-Hammer: ≈42 lb

### *Dimensions for Individual Module:*

Diameter: 5.75 in  
Length: 20.125 in

