


BOP Intervention Skid

Gen 1B

The Blowout Preventer (BOP) Intervention Skid allows any work class remotely operated vehicle (ROV) to perform function testing and emergency overrides of BOP functions. The skid has internal valves that can provide continuous pumping of saltwater in emergency situations. Using field-proven components, this Oceaneering skid features ease of service and built-in reliability.

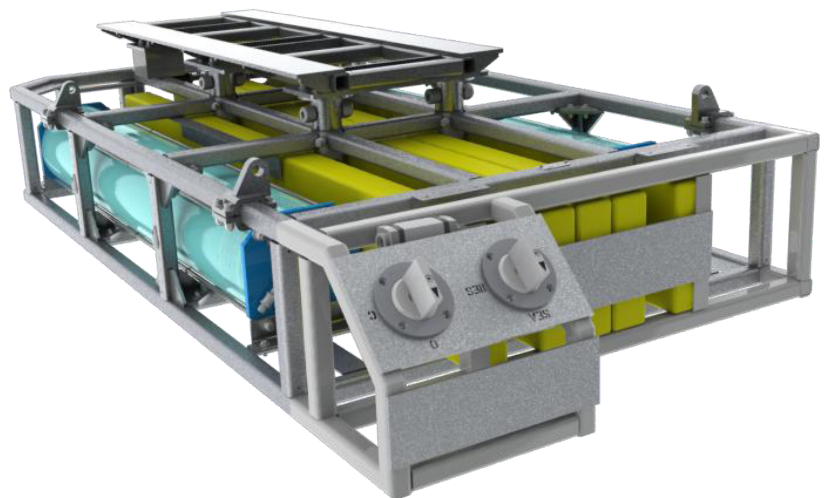

FEATURES

Up to 68 gal (257 l) of storage


Interfaces with any work class ROV system

Field-proven design

BOP Intervention Skid

Gen 1B

All components are corrosion resistant with seals designed for long-term well control fluid exposure. The BOP Intervention Skid is a modular design allowing components to be easily replaced or serviced. It is designed to support full ROV and tether-management-system (TMS) weight, since the skid must be fit for any ROV of opportunity.

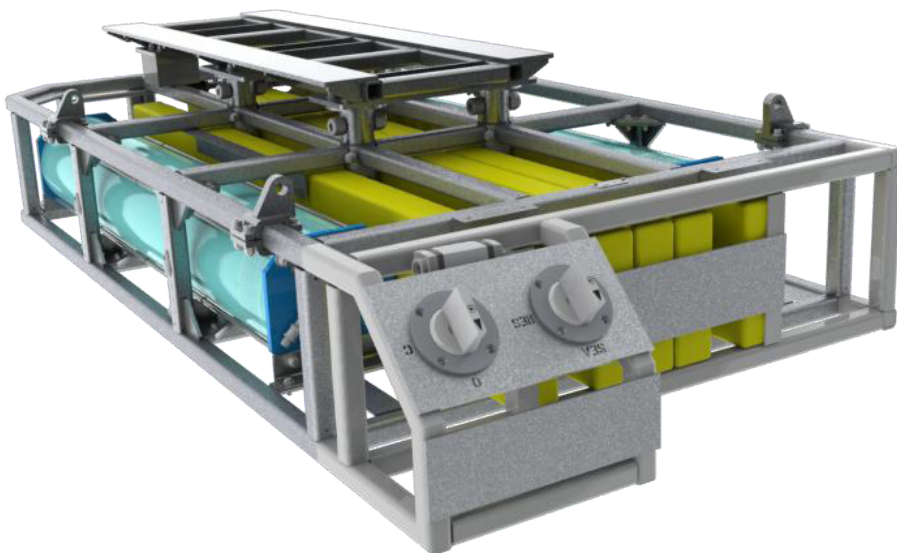

Technical data

Performance	
Input flow	0–20 gpm / 0–75 lpm
Input pressure	0–3,000 psi / 0–205 bar
Output flow	0–10 gpm / 0–37 lpm
Output pressure	0–5,000 psi / 0–345 bar
Stored volume	68 gal / 257 l (standard)

Weight and dimensions	
Weight in air (empty):	1,780 lbs / 808 kg
Weight in air (full)	2,500 lbs / 1,133 kg
Weight in water	120 lbs / 54 kg
Length	125 in / 3175 mm
Width	60 in / 1525 mm
Height	22 in / 558 mm
Depth rating	9,842 ft / 3000 m

© 2018 Oceaneering International, Inc. All rights reserved.